

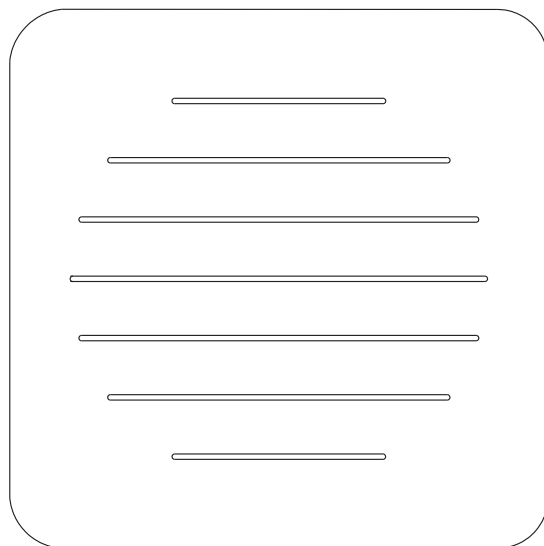
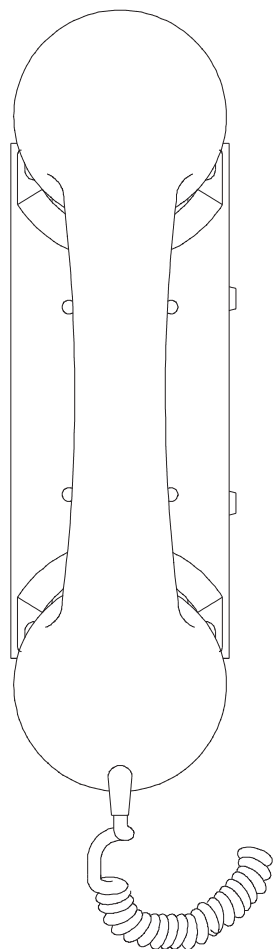



EDEL-21MC-CC

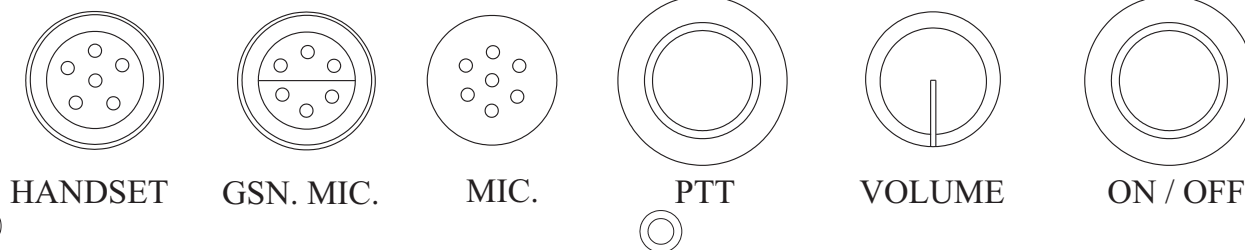



HOPARLOR

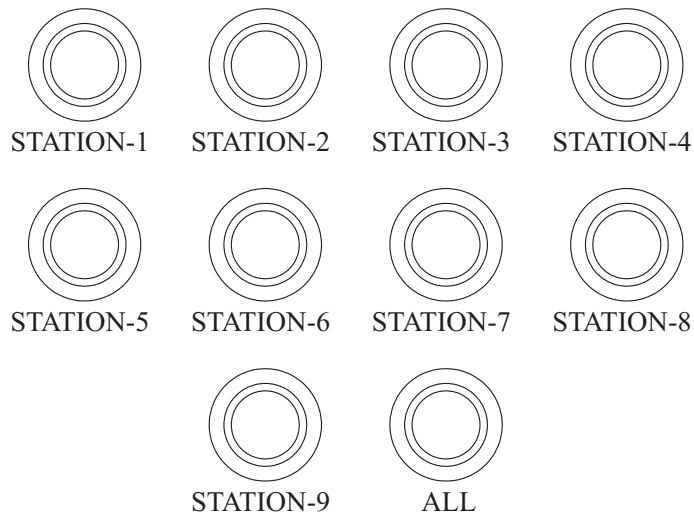


BOX SIZES : 172 X 121 X 106 mm
BOX COLOUR : RAL-7035

Caution
 All Power Supplies must be separately fused!
All Housings must be grounded!
If screened cables are not grounded as shown, malfunction will occur!

		ELEKTRO DENİZ Group of Companies Tuzla - İstanbul - Türkiye www.elektrodeniz.com		This document is the property of ELEKTRO DENİZ © Elektro Deniz Ltd 2009	
CTG	TITLE	DESIGN	Y.TAŞPINAR	DRAWN	Y.TAŞPINAR
SCALE	10 CHANNEL 21 MC STATIONS EDEL-21MC-CC	CHECK	K.ŞAHİN	DATE	16.11.2012
NTS		DRAWING No	PAGE 1/1		




MAIN STATION
STATION-1



LFMSGSGO 2X2X0,5 mm2
POWER

LFMSGSGO 12X2X0,4 mm2


STATION-7



LFMSGSGO 2X2X0,5 mm2
POWER

LFMSGSGO 12X2X0,4 mm2


STATION-8



LFMSGSGO 2X2X0,5 mm2
POWER

LFMSGSGO 12X2X0,4 mm2


STATION-9



LFMSGSGO 2X2X0,5 mm2
POWER

LFMSGSGO 12X2X0,4 mm2


STATION-10



LFMSGSGO 2X2X0,5 mm2
POWER

LFMSGSGO 12X2X0,4 mm2


STATION-2



LFMSGSGO 2X2X0,5 mm2
POWER

LFMSGSGO 12X2X0,4 mm2


STATION-3



POWER
LFMSGSGO
2X2X0,5 mm2

LFMSGSGO 12X2X0,4 mm2


STATION-4



POWER
LFMSGSGO
2X2X0,5 mm2

LFMSGSGO 12X2X0,4 mm2


STATION-5



POWER
LFMSGSGO
2X2X0,5 mm2

LFMSGSGO 12X2X0,4 mm2

STATION-6



POWER
LFMSGSGO
2X2X0,5 mm2

LFMSGSGO 12X2X0,4 mm2

INTERCONNECTION UNIT


EDEL-21MC-IC

ELEKTRO DENİZ
Group of Companies
Tuzla - İstanbul - Türkiye
www.elektrodeniz.com

This document is the property of
ELEKTRO DENİZ
© Elektro Deniz Ltd 2009

Caution
All Power Supplies must be separately fused!
All Housings must be grounded!
If screened cables are not grounded as shown, malfunction will occur!

CTG	TITLE	DESIGN	Y.TAŞPINAR
SCALE	10 CHANNEL 21 MC STATIONS EDEL-21MC-CC BLOCK	DRAWN	Y.TAŞPINAR
NTS		CHECK	K.ŞAHİN
Drawing No		DATE	16.11.2012
		PAGE 1/1	



BOX SIZE : 172 X 121 X 106 mm

BOX FEATURES : Aluminum alloy casting (3.5 mm)

PAINT : Electrostatic powder coated

CONNECTING INPUTS : Metal Gland with

AMPLIFIER POWER : 5 watts (speaker power: 15 Watts)

INPUT SUPPLY VOLTAGE : 115/220 V AC. - 24V DC.

DRAWN AT FULL LOAD CURRENT : 0,2A (115V AC.), 0,1A (220V AC.), 1,2A (24V DC.)

BOARD SUPPLY VOLTAGE : 12 V DC.

GOOSENECK MICROPHONE INPUT CONNECTION: Lemo Connector

HENDSET/HEADSET INPUT CONNECTION: U-229 U-Connector

CONTACT : The selected station / stations and two-way communication (Push to Talk).

CONTACT WARNING : flashing LED on the selected station (red) and 1 KHz tone.

STATION DISPLAY: Led on the selector button on the station.

SEND AND RECEIVE INDICATOR: The station TX LED. is a red-color LED on the select button. (When TX. LED is lit.)

VOLUME CONTROL: DC. volume control.

LINE AUDIO OUT : Adjustable line audio control (max 100mv).

PTT BUTTON : 18mm push button key with circular led.


ON/OFF BUTTON : 18mm push button key with circular led.

STATION SELECT BUTTONS : 16mm push button key with circular led.


STATION CALLING : 16mm push button key circular led is blinks.

ACCEPT STATION : 16mm push button key circular led is lit.

POWER SUPPLY INDICATOR : Push button key on the circular LED indicator.

		ELEKTRO DENİZ Group of Companies Tuzla - İstanbul - Türkiye www.elektrodeniz.com		This document is the property of ELEKTRO DENİZ © Elektro Deniz Ltd 2009	
CTG	TITLE	DESIGN	Y.TAŞPINAR	DRAWN	Y.TAŞPINAR
SCALE	NTS	CHECK	K.ŞAHİN	DATE	16.11.2012
Drawing No	10 CHANNEL 21 MC STATION EDEL-21MC-CC PROPERTIES		PAGE 1/1		

Caution

 All Power Supplies must be separately fused !
All Housings must be grounded !
If screened cables are not grounded as shown, malfunction will occur !